

W-08-23-0885



: 7/8" N

:

:

:





7/8" N

105

105

7/8" N

7/8" N

2022 1 1 -2022 12 31

19.4 kg CO₂-eq

ISO 14040: 2006

ISO 14044: 2006

ISO 14067: 2018

2022

2023 3 15



1.	3
2.	3
3.	3
4.		



1.

7/8" N

"

"





4.

4.1

5MHz~5800MHz

PVC


4.2

7/8" N

4.3


4.4

4.4.1

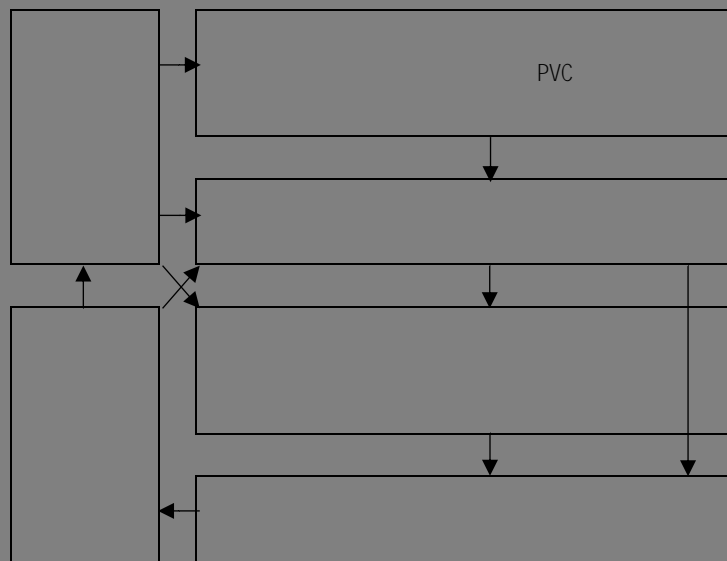



4.4.2

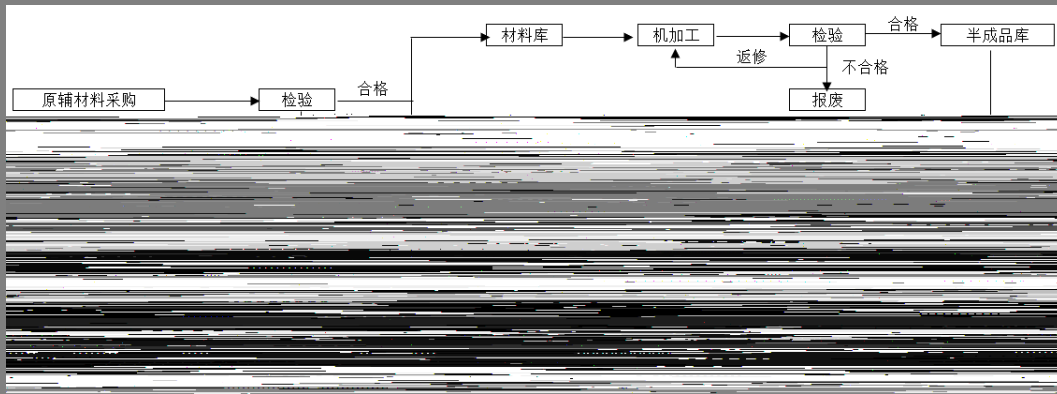

5.

5.1

2022

2022 1 1 2022 12 31

105

*
*
*
*
*
*
*

1 4

1

	NML7/8M. 00. 01-HPb55-3/-HX	3	25.6	g
	NML1/2H. 00. 03-HPb55-3/-HX	3	6.6	g
	NML7/8F. 07. 04-HPb55-3/-HX	3	32.85	g
	NML7/8K. 03. 04-HPb55-3/-HX	3	7.4	g



W-08-23-0885

6

11



Ecoinvent 3

IPCC 2006

2019

()

2

2022 10

2022

5.3

5 Ecoinvent 3-allocation at point of substitution- unit

Diesel, burned in building machine {GLO} processing APOS, U
Diesel, low-sulfur {RoW} diesel production, low-sulfur, petroleum refinery operation APOS, U
Hard coal {CN} hard coal mine operation and hard coal preparation APOS, U
Heat, district or industrial, other than natural gas {RoW} heat production, at hard coal industrial furnace 1-10MW APOS, U
Pig iron {RoW} pig iron production APOS, U
Transport, freight, lorry 3.5-7.5 metric ton, EURO5 {RoW} transport, freight, lorry 3.5-7.5 metric ton, EURO5 APOS, U

6.

6.1

1%
0.05%
5%

6.1.1

cut-of

0.25m 120

0.05%

6.1.2



2022 1 1 2022 12 31

6.2

0.5%

6.2.1

cut-of

6.2.2

6.3

2019

GWP100

IPCC

7

19.4

kgCO₂-eq

Upstream transportation

0.007

Raw material assembly

6.84

Packaging

0.303

Downstream transportation

12.2

kgCO₂-eq

Rear housing

2.67

Enclosure

1.86

Screw insert

1.34

Cable clamp

0.487

Riveted tube

0.241

Circlip

0.0751

Insulator

0.0494

PVC PVC flat pad

0.0436

Pin


0.0434

Seal ring


0.0297



7.1

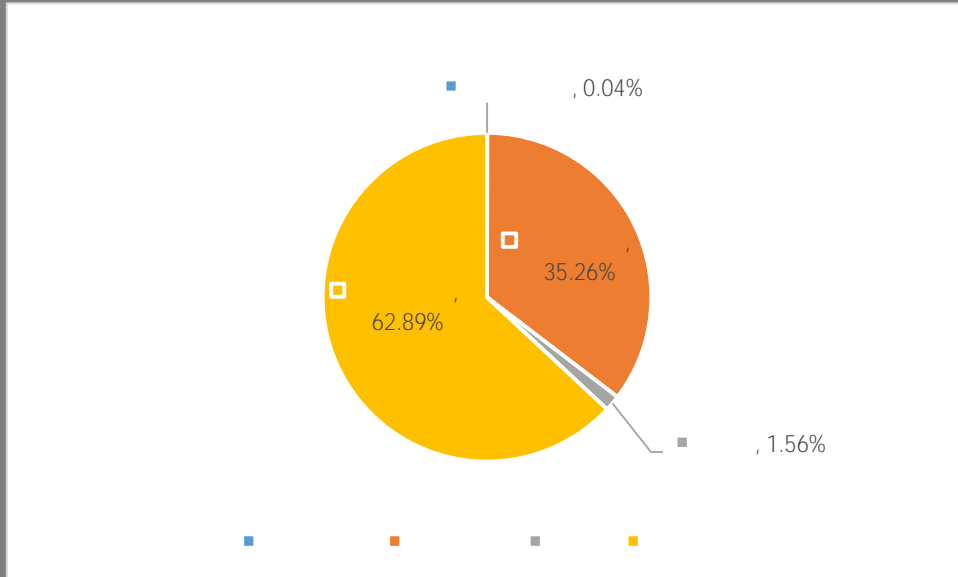

1

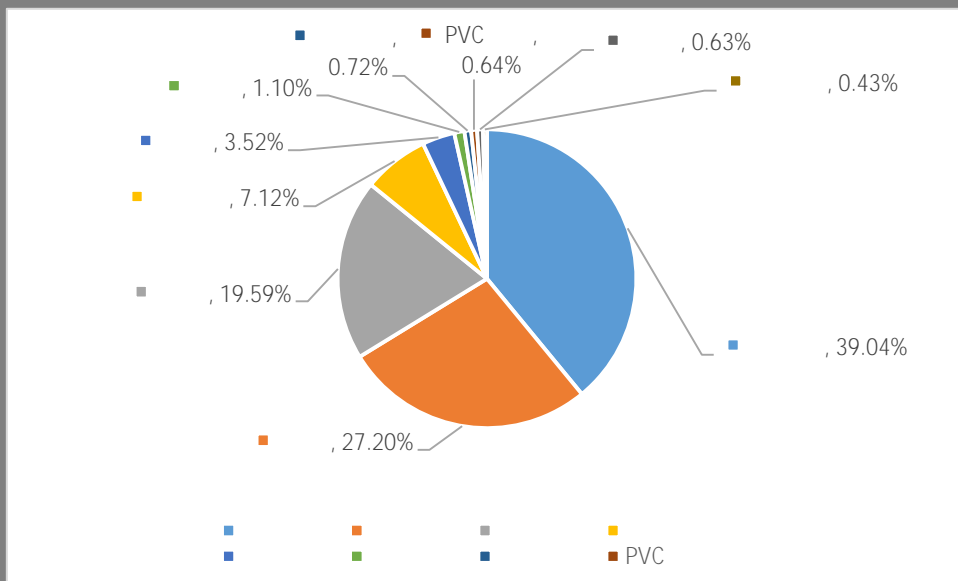

2



7.2

7.2.1

cut-of

7.2.2

IPCC 2021 GWP100 V1.01

3

-

GWP100

19.4 kg CO₂-eq

95%



2023

8

8.1

8.2

武汉网锐检测

8.3

8.4

[Redacted content]

